



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-LED PANEL LIGHT

EAG-PLR-72W



Advantages

- UL DLC CE RoHS TUV certificate
 - High CRI
 - External driver, input voltage AC100-277V
 - No UV or IR in the beam
 - Easy to install and operate
 - Energy saving, long service life
 - Dimmable OPTION
 - Instant start, NO flickering, NO humming
 - Green and eco-friendly without mercury
-


WWW.EAG-LED.COM



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLR-72W Technical Data

Color temperature	2700-8000K
CRI	>80
Lumen	7920LM
Input Power	72W
Viewing Angle	120 Degree
Input Voltage	AC100-277V
Frequency Range	50-60 HZ
PFC	>90%
Life Span	50000 Hours
Waterproof Rating	IP41
Operating Temperature	-20°C TO 45 °C
Operating Humidity	20%-70% RH
Storage Temperature	-30°C TO 80 °C
Storage Humidity	10%-75% RH
Application	Indoor
Certification	UL DLC CE RoHS TUV
Housing	Aluminum
Light guide plate	PMMA

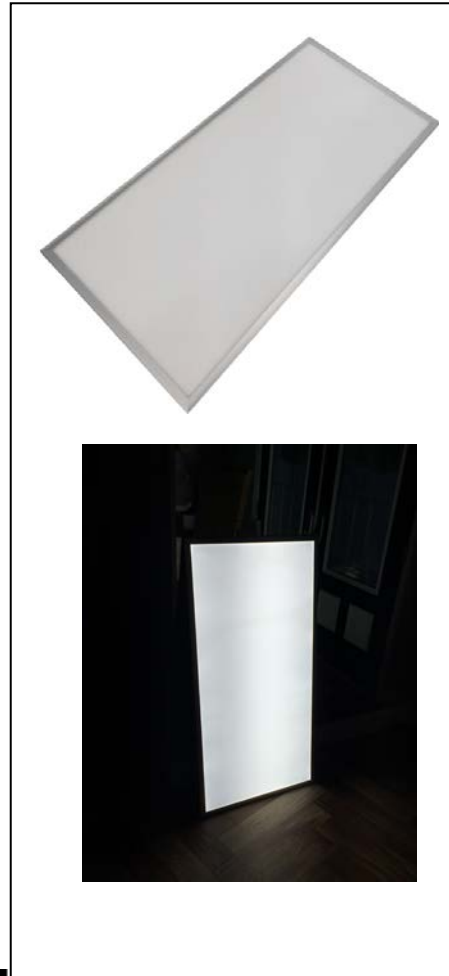





13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLR easy install for

Embedded :

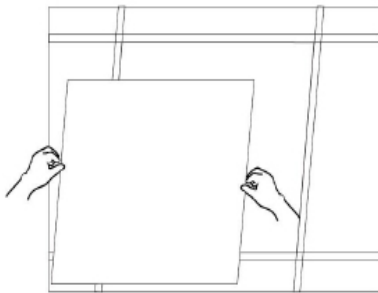


(1)

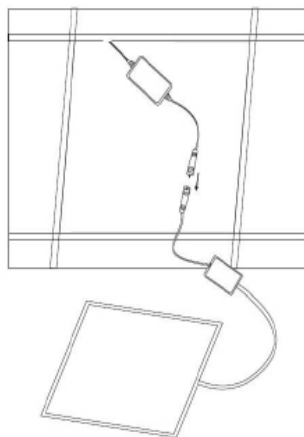


(2)

1. Remove the ceiling gypsum board.
2. Connect the driver wire.
3. Put the panel on the ceiling.
4. Turn on the electric current and the panel can be used.

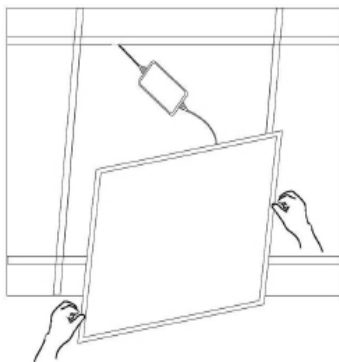

(3)

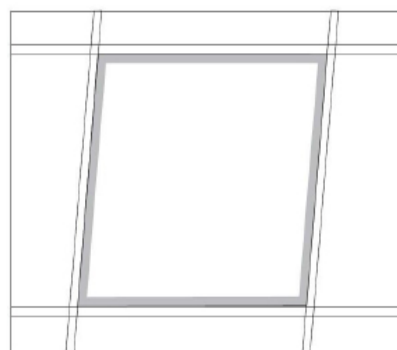


(4)




13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLR easy install for


Rope Fixed :

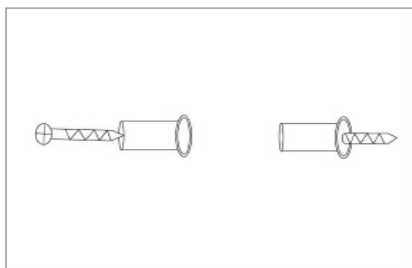


(1)

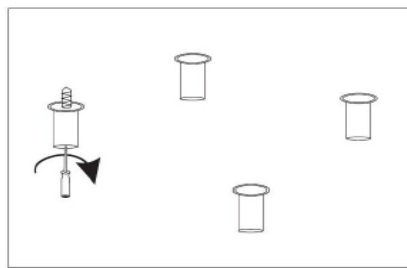

(2)

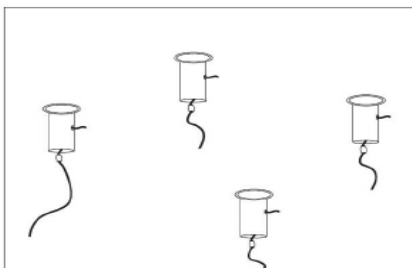

(3)

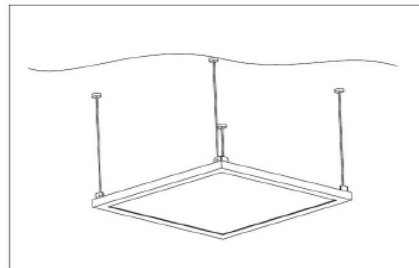

(4)

1. Fix the retainer on the wall with screws.
2. Thread the rope.
3. Screw the another retainer.
4. Fix the rope on the panel, and adjust the length of rope.
5. Connect the driver wire.
6. Turn on the electric current and the panel can be used.



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

Applications

Widely used in supermarkets, offices, hotels, hospitals, schools, meeting rooms, in a library, or residential, etc.

