



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-LED PANEL LIGHT

EAG-PLR1X4-45W



Advantages

- CE DLC UL RoHS TUV FCC certificate
 - High CRI
 - External driver, input voltage AC100-277V
 - No UV or IR in the beam
 - Easy to install and operate
 - Energy saving, long service life
 - Light is soft and uniform, safe to eyes
 - Instant start, NO flickering, NO humming
 - Green and eco-friendly without mercury
-

WWW.EAG-LED.COM



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLR1X4-45W Technical Data

Color temperature	3000-5500K
CRI	>85
Lumen Efficacy	100 lm/w
Input Power	45W
Viewing Angle	120 Degree
Input Voltage	AC100-277V
Frequency Range	50-60 HZ
PFC	>90%
Life Span	50000 Hours
Waterproof Rating	IP41
Operating Temperature	-20°C TO 45 °C
Operating Humidity	20%-70% RH
Storage Temperature	-30°C TO 80 °C
Storage Humidity	10%-75% RH
Application	Indoor
Certification	CE DLC UL RoHS TUV FCC
Housing	Aluminum
Light guide plate	PMMA



Easy Surface Mounting Fixture



13046 RACETRACK RD SUITE 187 TAMPA FL 33626




Applications

WWW.EAG-LED.COM



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

Widely used in supermarkets, offices, hotels, hospitals, schools, meeting rooms, in a library, or residential, etc.

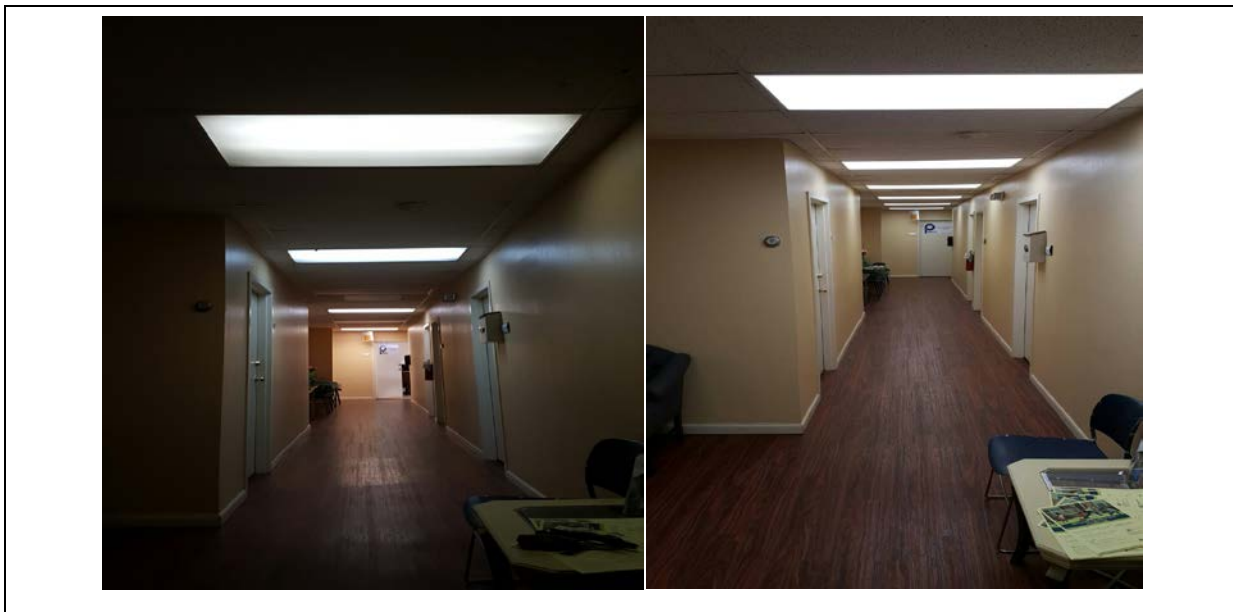

BEFORE

AFTER