



13046 RACETRACK RD SUITE 187 TAMPA FL 33626
EAG-LED PANEL LIGHT

EAG-PLS-36W



Advantages

UL DLC CE Listed

- High CRI
- External driver, input voltage AC100-277V
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long service life
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLS-36W Technical Data

Color temperature	3000-5500K
CRI	>80
Lumen	3960
Input Power	36W
Viewing Angle	120 Degree
Input Voltage	AC100-277V
Frequency Range	50-60 HZ
PFC	>90%
Life Span	50000 Hours
Operating Temperature	-20°C TO 45 °C
Operating Humidity	20%-70% RH
Storage Temperature	-30°C TO 80 °C
Storage Humidity	10%-75% RH
LED QTY	204 PCS
Housing	Aluminum
Light guide plate	PMMA







13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLS easy install for


Embedded :

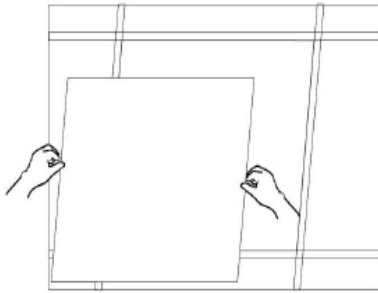


(1)

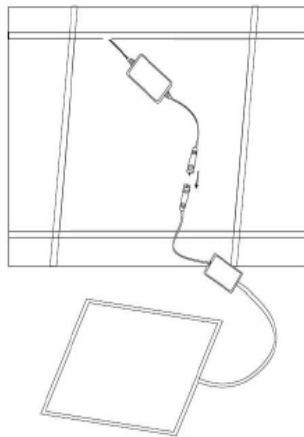

(2)

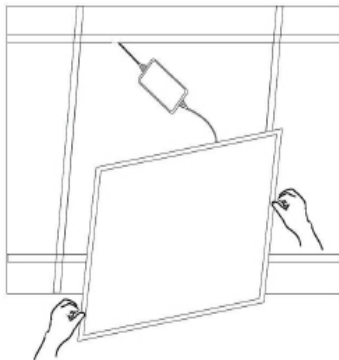

(3)

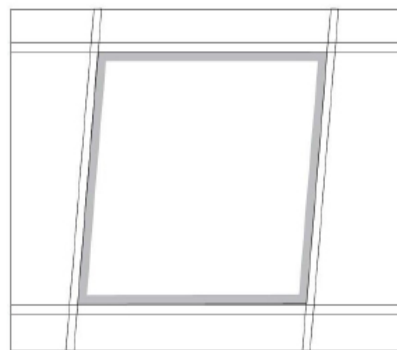

(4)


1. Remove the ceiling gypsum board.
2. Connect the driver wire.
3. Put the panel on the ceiling.
4. Turn on the electric current and the panel can be used.




13046 RACETRACK RD SUITE 187 TAMPA FL 33626

EAG-PLS easy install for


Rope Fixed :

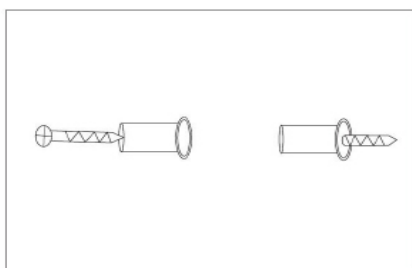


(1)

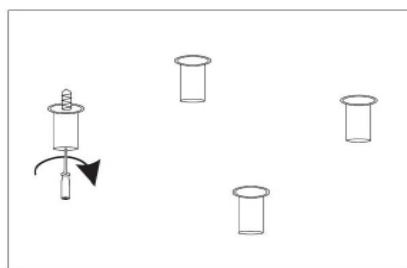

(2)

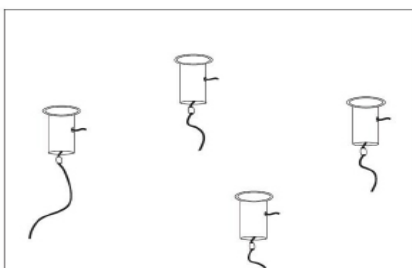

(3)

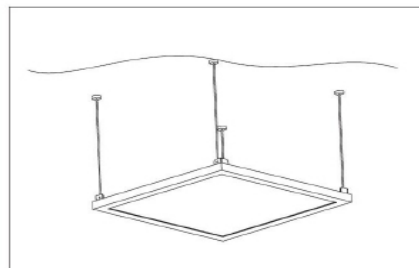

(4)


1. Fix the retainer on the wall with screws.
2. Thread the rope.
3. Screw the another retainer.
4. Fix the rope on the panel, and adjust the length of rope.
5. Connect the driver wire.
6. Turn on the electric current and the panel can be used.



13046 RACETRACK RD SUITE 187 TAMPA FL 33626

Applications

Widely used in supermarkets, offices, hotels, hospitals, schools, meeting rooms, in a library, or residential, etc

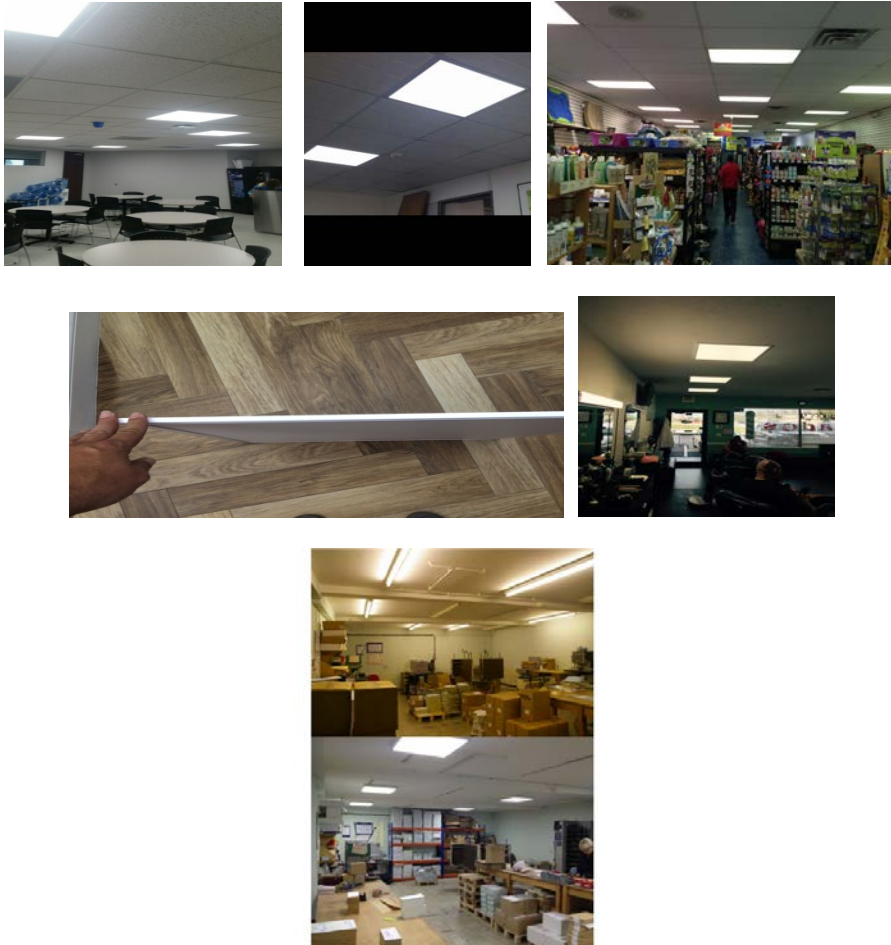

WWW.EAG-LED.COM