



13046 Race Track Rd. #187  
Tampa, FL 33626  
(813) 463-2420  
www.eag-led.com

## WALL PACK LIGHT



### Advantages

- UL cUL DLC certificate
- IP65 driver, Input voltage 100-277Vac
- No UV or IR in the beam
- No Maintenance
- No UV or IR in the beam
- Energy efficient, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.


### Applications

- Entrance lighting, Wall lighting
- Landscaping lighting, Hotels



13046 Race Track Rd. #187  
 Tampa, FL 33626  
 (813) 463-2420  
 www.eag-led.com

## WALL PACK LIGHT

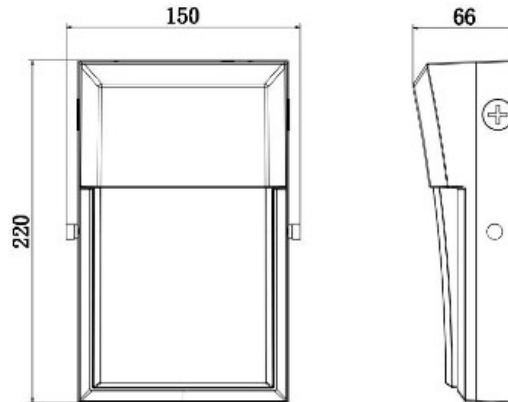

### Technical Specifications

Color Temperature	2700 – 7000K	Waterproof Rating	IP65
CRI	>80	Operating Temperature	-20°C TO 45°C
Lumen	2200– 2400LM	Operating Humidity	20% - 90% RH
Input Power	20W	Storage Temperature	-30°C TO 80°C
Viewing Angle	110 degree	Storage Humidity	10% - 95% RH
Input Voltage	50-60 HZ	Application	Indoor/Outdoor
PFC	>.9	Certification	UL cUL DLC
Housing color	Black	Housing	Aluminum

Product Specifications		Materials	
Product Name	LED Wall Pack Light	Driver Model	HE20WU-01-A0500
Part Number	EAG-WP2-20W	LED Type	2835 (.2W)
Dimension	220*150*65mm	Housing color	Black



13046 Race Track Rd. #187  
 Tampa, FL 33626  
 (813) 463-2420  
 www.eag-led.com

# WALL PACK LIGHT

## Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 88.12 lm/W
MODEL		I <sub>max</sub> (cd)	645.6	S/MH (C0/180)	1.16	
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1616.1	η UP, DN (C0-180)	0.0, 45.2	
NOMINAL FLUX (lm)	1616.08	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 54.8	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

